



Be heard


Public Address System SPA 1500



www.phontech.no

your communication partner

The SPA-1500 system is a standard marine Small Public Address system, especially designed to cover the need for PA and entertainment distribution onboard small and medium size vessels. This system has a very compact design, but comprises much of the functionality of larger systems. The customers may choose between many additional functions/facilities, and thus obtain an almost tailor-made PA system.

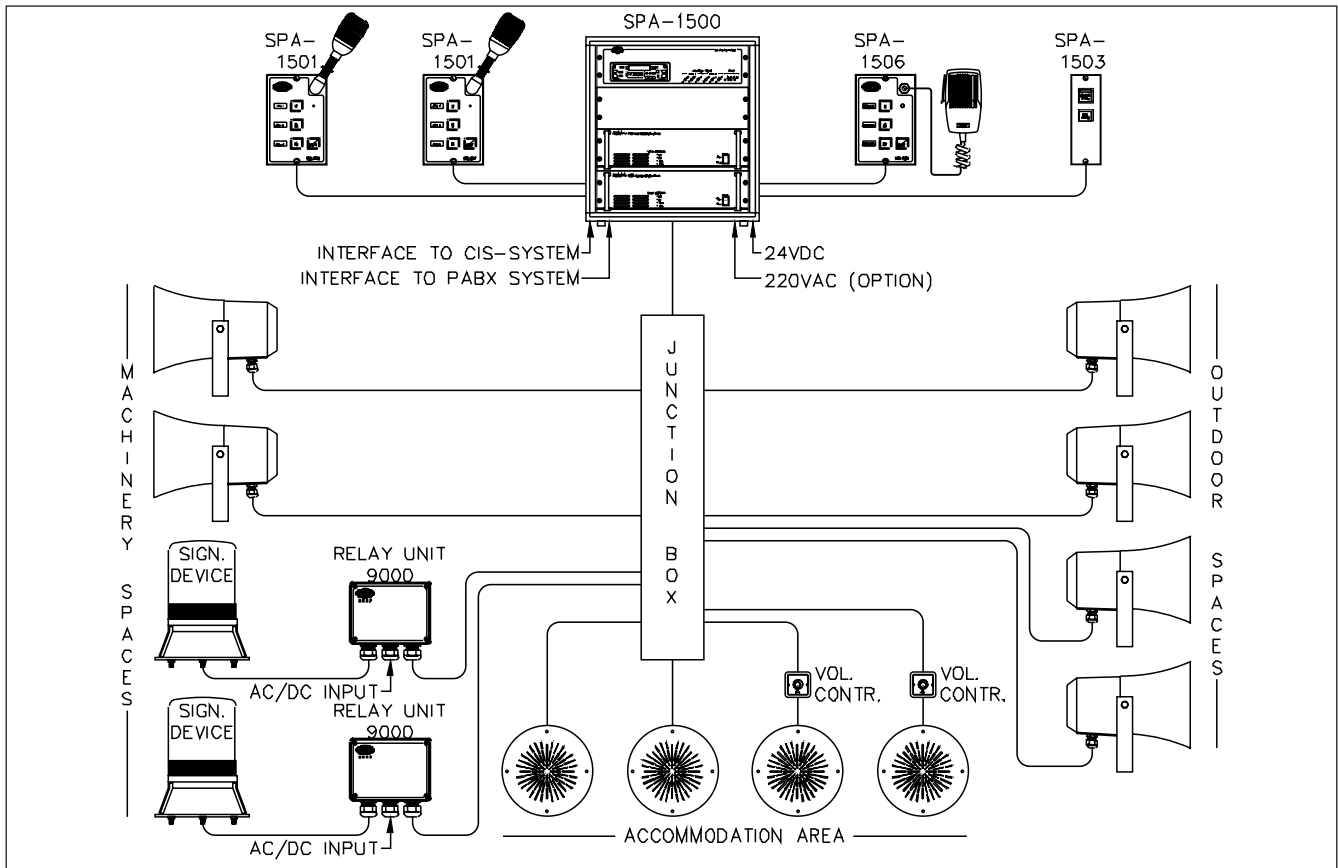

FACILITIES:

- Self supporting rack modules, outer cabinet available.
- Extremely compact design.
- Up to 3 zones selectable in any configuration.
- Up to 3 microphone units, full facility or predefined access.
- Up to 1080W output power. (further expansion optional).
- External paging facility. (from PABX etc.).
- 2 entertainment sources, each distributed to any zone(s).
Source 1: internal Cassette/CD/radio player,
source 2: any external audio program.
- Facility for muting local loudspeaker during paging.
- 6 access priority levels.
- 3 different alarms w/priority. (optional).
- Chime/"ding-dong" generator. (optional).
- Override of volume-controls during paging.
- Alarm light signal activation. (optional).
- Mute of external alarm facility. (optional).

TECHNICAL:

- SPA-1500 and power amplifiers are 19" rack mounting.
- 1510 rack is 6 HE/19" h=338, w=553, d=600mm.
- 1530 rack is 12HE/19" h=604, w=553, d=600mm.
- Power requirement : 24VDC , 110-240VAC with automatic mains failure backup. (option).
- Power consumption: Dependant of amplifiers used.
- Available amplifiers : 120W, 240W, 360W units.
- Related units: Relay unit 9000, Volume controls from 6-100W, Signal lights, PA loudspeakers (100V line).
- Microphone input level : 5mV (typical).
- External paging input/output level: 0dBm (typical).
- External paging activation : NO/NC dry contacts.
- Entertainment input level: 0dbm (typical).
- Amplifiers output level : 100V.
- SPA 1501/1506 control unit, flush or wall (option).
- Noise cancelling gooseneck -, or hand microphone.
- Backlight of switchpanel.
- 1501/1506 dimension : h=144, w=96, d=47mm



a member of the JOTRON group

Phontech as • P.O.B. 274 • N-3192 Horten, NORWAY
Telephone +47 3308 3500 • Telefax +47 3308 3501
E-mail: sales@phontech.no • www.phontech.no

Distributor:

SELEX Communications Ltd
Marconi House
New Street
Chelmsford
Essex
CM1 1PL
United Kingdom

SELEX
Communications

a Finmeccanica Company

Tel: +44 (0)1245 275588

Fax: +44 (0)1245 275689

Email: marine-sales@selex-comms.com

www.selexmarine.com